

=

IC

,


	XKC-Y29D-V XKC-Y29D-NPN
	DC12V-24V
	≤10%V
	≤10mA
	≤500mS
	≤100mS
	-25~85
	0%~90%
()	D3 D4 D6 D8 D10 D12 D13 D15 D16 D18 D20 D25
	≤20% -25 ~+60
	≤25000uS/cm
	3mm
	500MM ±10MM
	VCC OUT GND MARK
	PC+ABS
	IP67
	CE
	ROHS-2.0

1	XKC-Y29D-D3-V		≤3mm	≥2mm
2	XKC-Y29D-D3-NPN	NPN		
3	XKC-Y29D-D4-V		≤4mm	≥2mm
4	XKC-Y29D-D4-NPN	NPN		
5	XKC-Y29D-D6-V		≤6mm	≥2mm
6	XKC-Y29D-D6-NPN	NPN		
7	XKC-Y29D-D8-V		≤8mm	≥4mm
8	XKC-Y29D-D8-NPN	NPN		
9	XKC-Y29D-D10-V		≤10mm	≥6mm
10	XKC-Y29D-D10-NPN	NPN		
11	XKC-Y29D-D12-V		≤12mm	≥6mm
12	XKC-Y29D-D12-NPN	NPN		
12	XKC-Y29D-D13-V		≤13mm	≥7mm
14	XKC-Y29D-D13-NPN	NPN		
15	XKC-Y29D-D			

J

ADD - D D

3

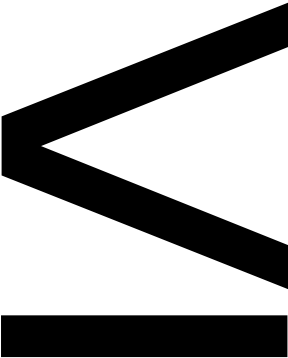

33 35


http://www.xk.com

86-0755-33515410

48

/

5.1 XKC-Y29D-V

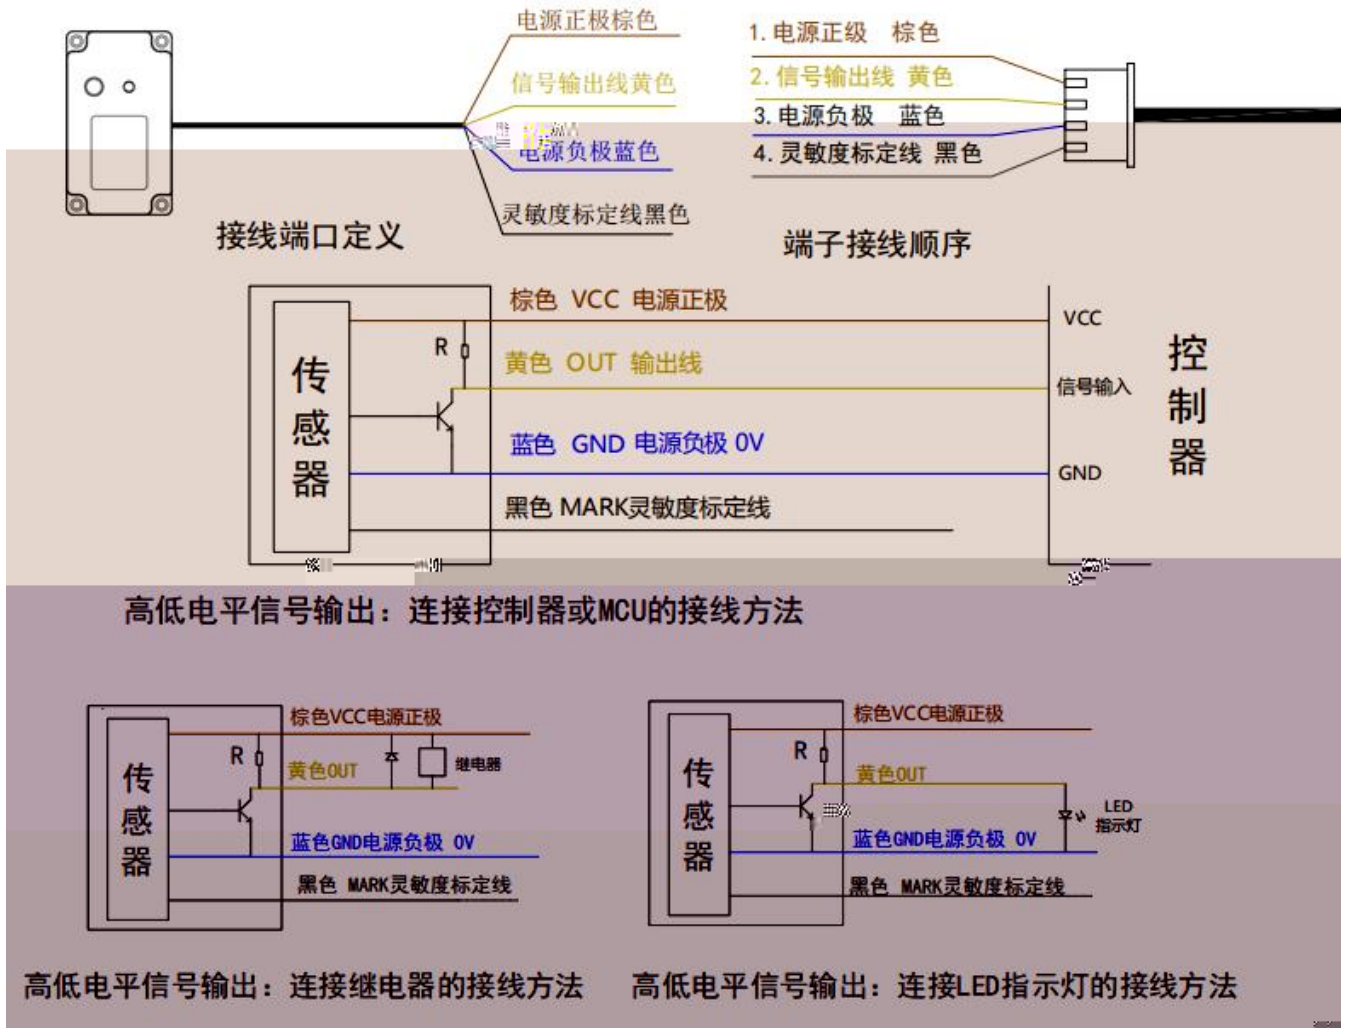

($\leq 100\text{mA}$)


5.2 XKC-Y29D-NPN




NPN (≤100mA)

MARK

2

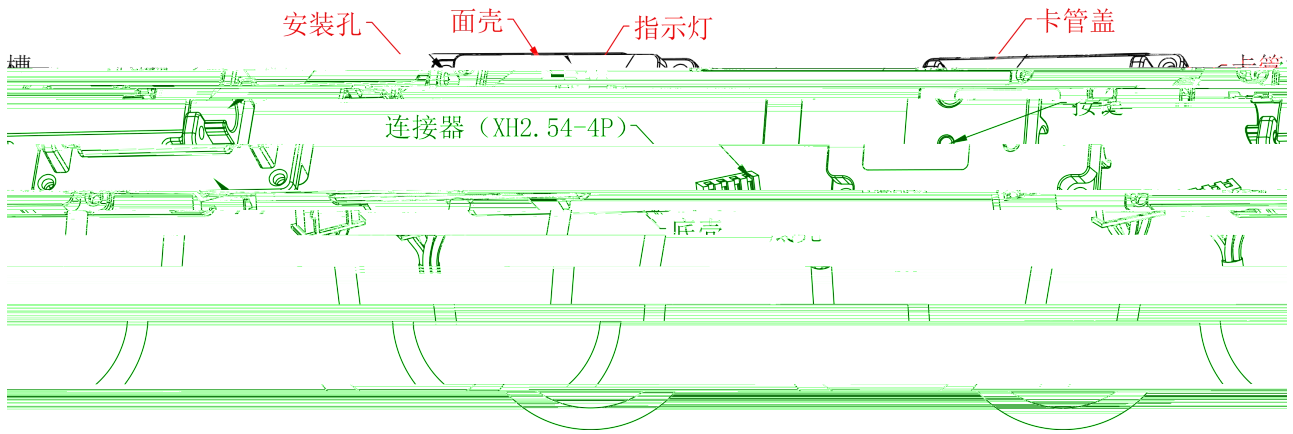

MARK

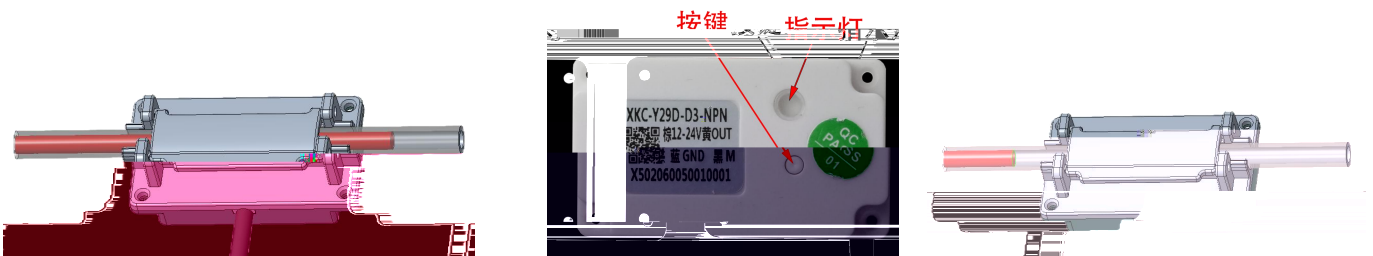

1

2

3

1. 1 ()





5mm



2. 2 MARK

GND 1S



Shenzhen XingKeChuang Technolog

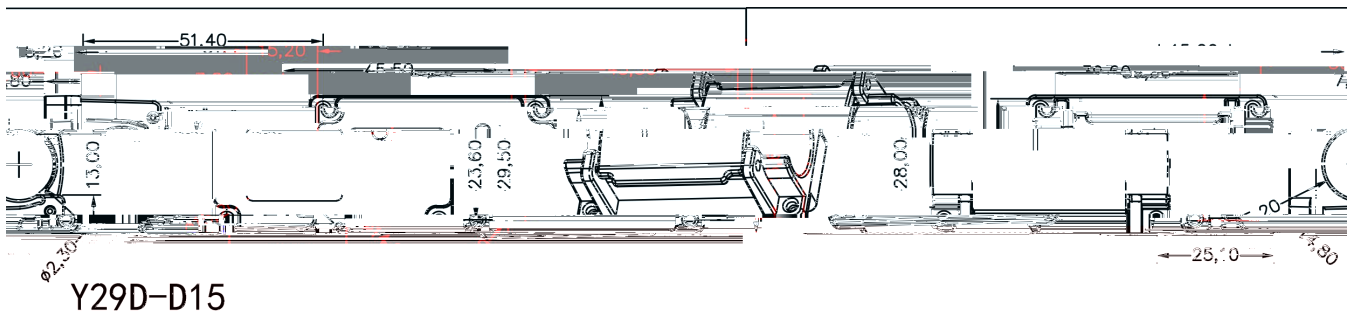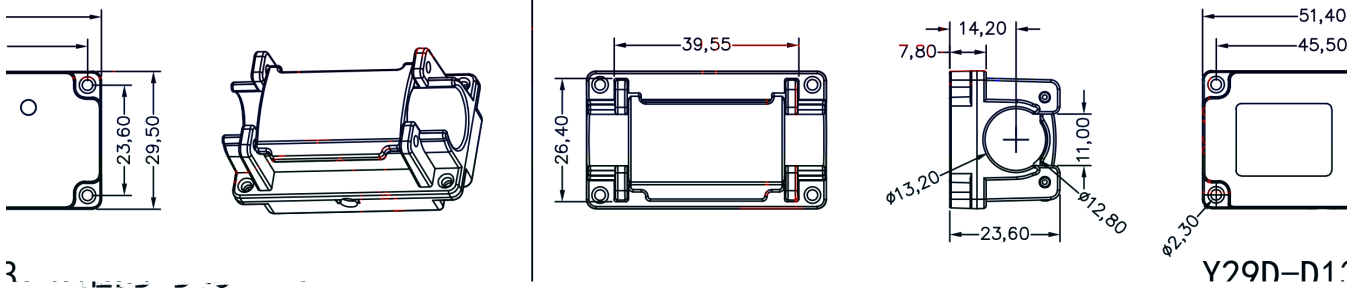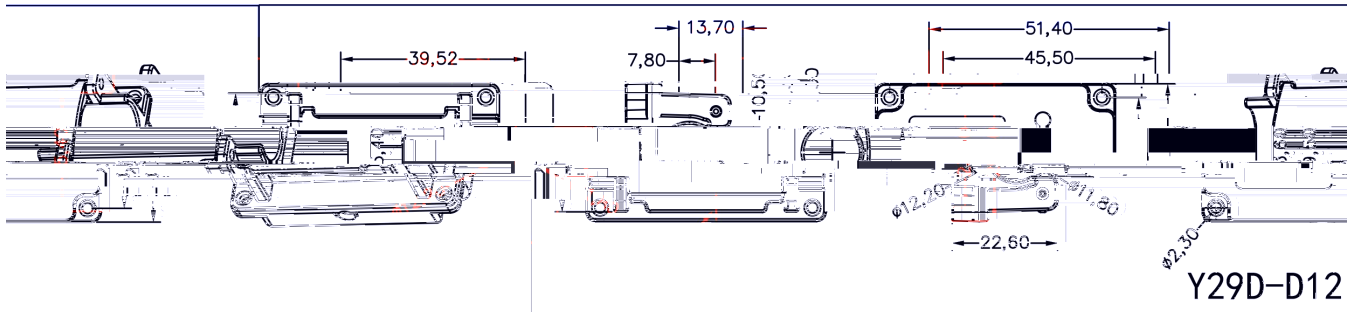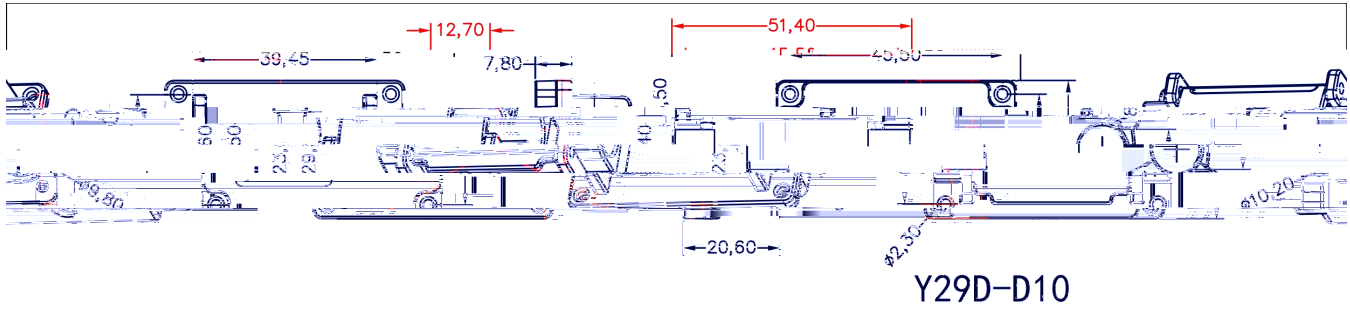

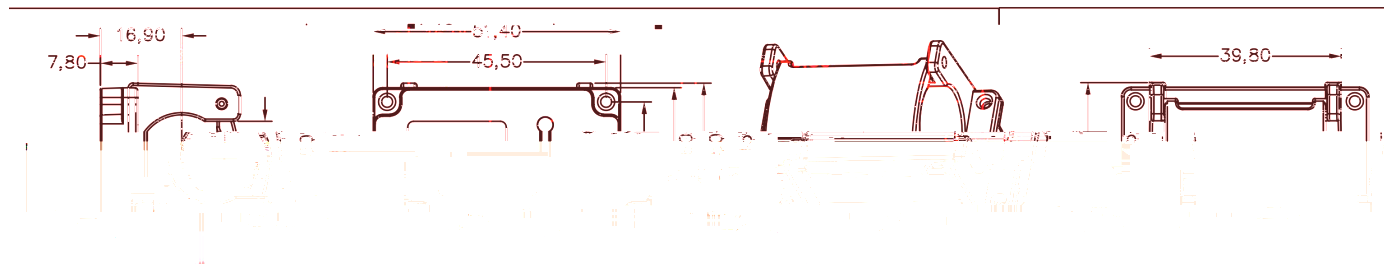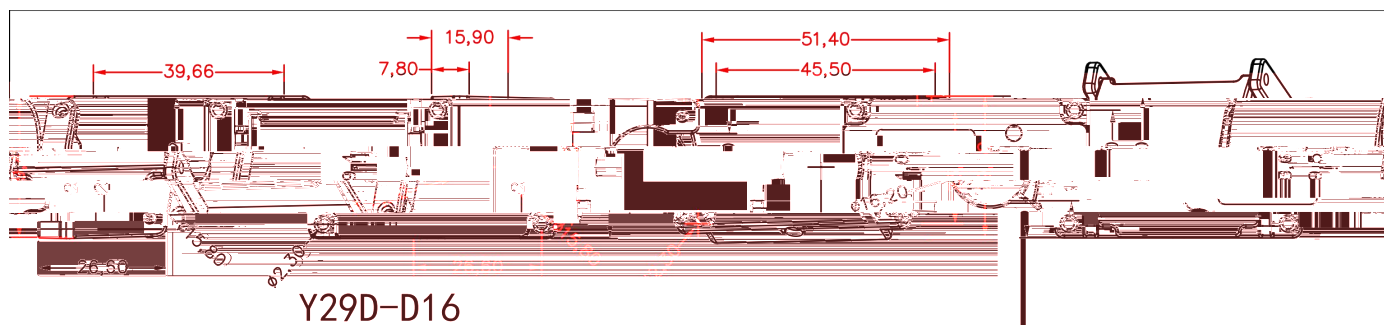

•

1. ☐ >20mPaS
2. ☐
3. ☐
4. ☐



6.

/



Shenzhen XingKeChuang Technology Co., Ltd.